

Multi-Voltage Relay Module

Suitable for Fire Alarm and Other Applications

0E-FRLY24V10


UltraTech
POWER PRODUCTS

PRODUCT DESCRIPTION

0E-FRLY24V10 is an encapsulated multi-voltage relay suited to applications requiring a remote relay for control or status feedback. It includes long flying leads with selectable input voltage. A red LED indicates that the relay coil is energized. Applications include fire alarm control, security systems, HVAC, temperature control, lighting systems and energy management. 0E-FRLY24V10 is UL864 listed for Fire Alarm Control Equipment. Includes mounting/wiring hardware.

FEATURES

- Selectable 24VDC, 24VAC or 120VAC input voltage
- Polarized coil input: DC control input only
- Dry Form C SPDT contacts
- Red LED indicates relay coil is energized
- Six (6) 12" 18AWG flying leads
- ABS plastic housing, epoxy resin potting

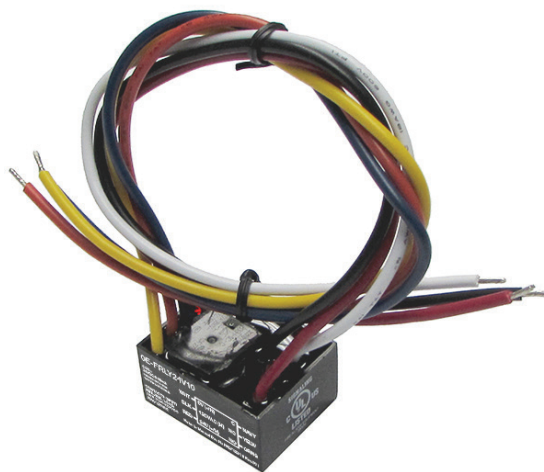

SPECIFICATIONS

PART #	0E-FRLY24V10
UPC	811914027034
INPUT VOLTAGE	12 or 24VDC
CURRENT DRAW	15mA@24VDC 52mA@24VAC, 60Hz 38mA@120VAC, 60Hz
CONTACT RATINGS	250μA/0.35 P.F.@5VDC 7A/0.35 P.F.@24VDC 10A@120VAC
OPERATING TEMPERATURE	32°F to 120°F (0°C to 49°C)
HUMIDITY RANGE	10 - 93% RH
DIMENSIONS (CASE ONLY) (L x W x H)	1.5" x 1.2" x 0.8" (38 x 31 x 20mm)
WEIGHT	2.4 oz. (67g)



UL 864 LISTED
FIRE ALARM CONTROL
EQUIPMENT



MEA
approved